

Radio Resource Management in Heterogeneous Wireless Networks

Jason Ernst, PhD Student, University of Guelph
Pervasive and Wireless Networking Research Group (PERWIN)

Advisor: Dr. Nidal Nasser

1st PhD Seminar – August 31st 2010

Outline


- **Introduction**
- Motivation
- Architectures for HWNs
- Applications and Deployments of HWNs
- Classification of Solutions
- Limitations, Open Research Problems
- Conclusions & Future Work

Introduction

- Heterogeneous Wireless Networks (HWNs)
 - Composed of component (homogeneous) networks or technologies
 - 802.11 (Wifi), 802.15 (Bluetooth, Zigbee), 802.16 (WiMAX), Cellular and Mobile Technologies
 - Called “Radio Access Technologies” or RATs
 - Many modern devices contain several different radios: ex) Bluetooth, Wifi, GPS, CDMA



Introduction

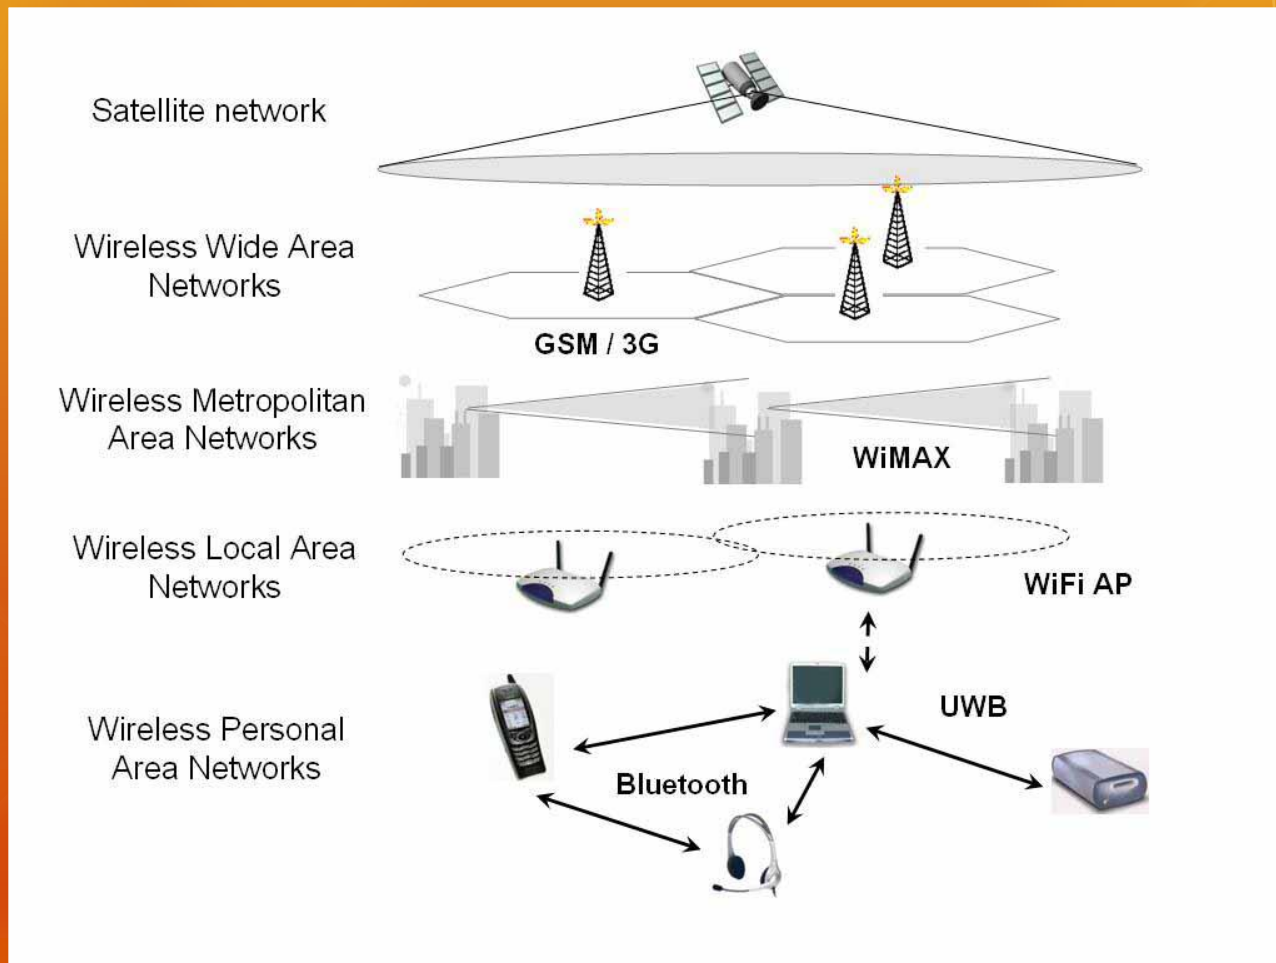

Outline

- Introduction
- **Motivation**
- Architectures for HWNs
- Applications and Deployments of HWNs
- Classification of Solutions
- Limitations, Open Research Problems
- Conclusions & Future Work

Motivation

- Cellular / Mobile & WiMAX technologies provide widespread coverage
 - Limited bandwidth, high cost
- Wifi, Bluetooth, Zigbee provide high bandwidth, low cost
 - Limited coverage
- Existing technologies do not work well together
- Users manually select technology / radio for use in many cases

Motivation

Start on wifi, want to
Seamlessly continue
transmitting via Skype
On my way to my car




Outline

- Introduction
- Motivation
- **Architectures for HWNs**
- Applications and Deployments of HWNs
- Classification of Solutions
- Limitations, Open Research Problems
- Conclusions & Future Work

Dense Architectures


- Multiple RATs available in many places within the network
- User device or networks able to decide on best access
- Best used in:
 - urban environments
 - Environments with extensive infrastructure
 - Where more capacity is required in the network

Dense Architecture

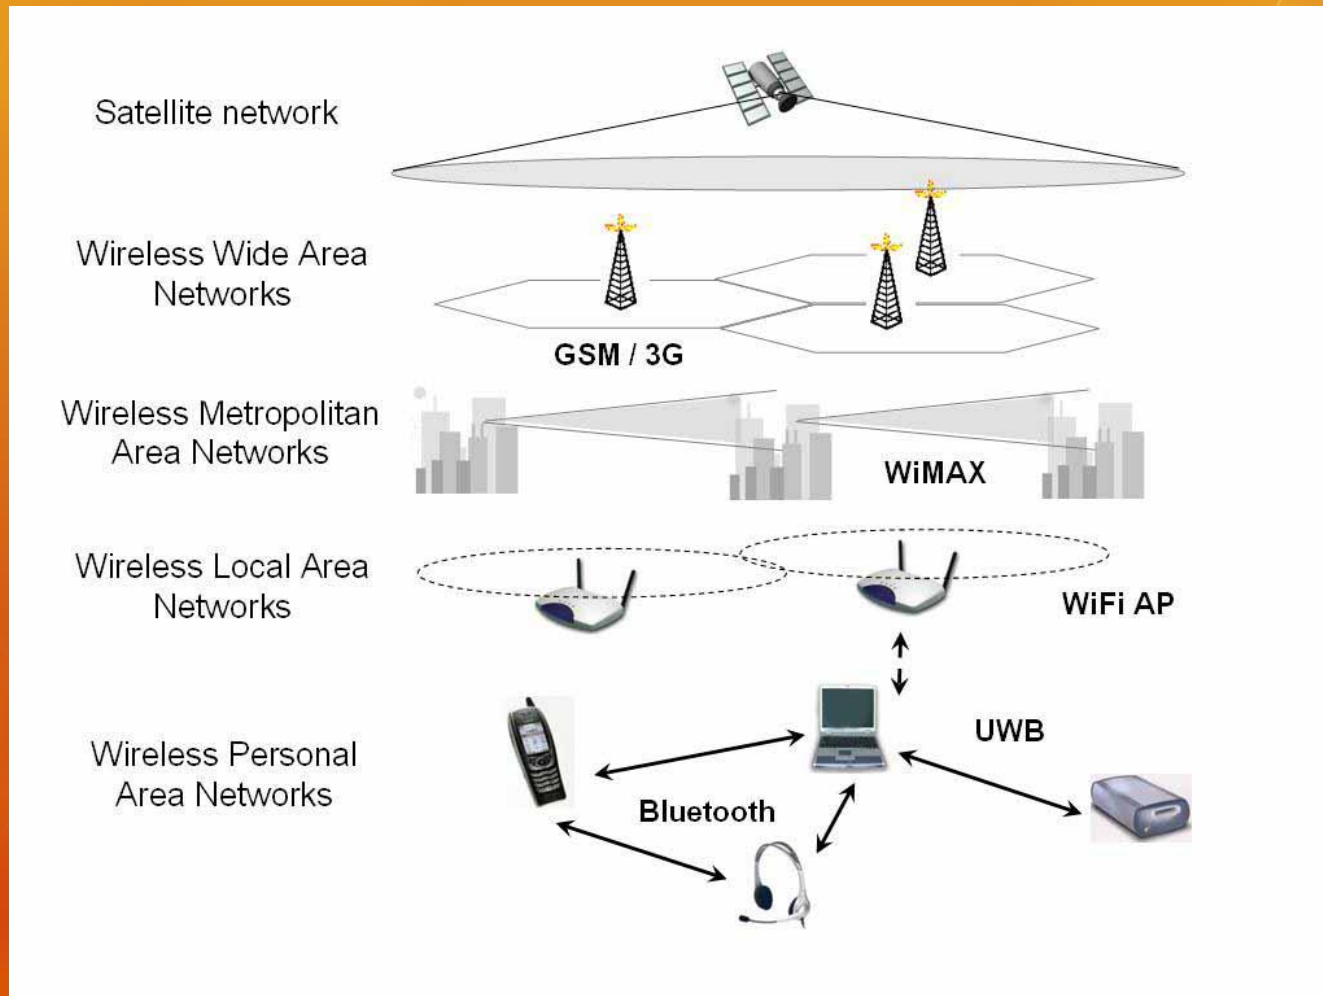

Dense Architecture

At a given position, a device may have multiple technologies it is able to connect to

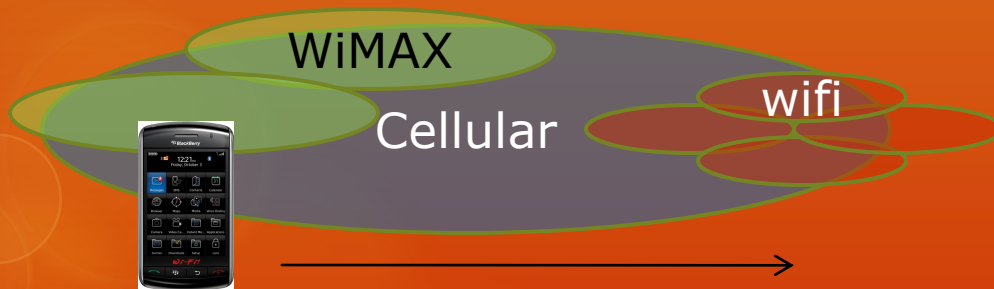


Sparse Architectures

- Network stitched together with different technologies
- Often only one possible choice for access
- Route traffic through several technologies to Internet gateway
- Best used in:
 - rural environments
 - developing countries

Sparse Architecture

- Traffic originating in a network without an Internet gateway (GW)
- Which network to route through?
 - Consider: cost, capacity, congestion, power levels etc.
- Also consider networks which are opportunistic
 - Portions of the network may be unavailable at a given time

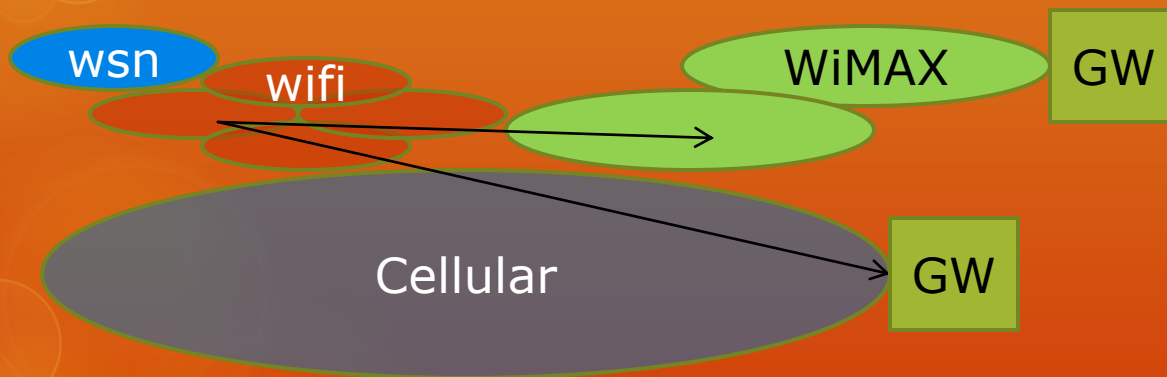

Variations on Architectures

- Variations of HWN Architectures
 - Repeater / Relay Nodes [15]
 - Used to add capacity, reduce distance of long links, aggregate data, reduce power consumption
 - Caching / Prefetching Solutions [13,14]
 - One of more layers cache data to reduce requests to Internet
 - Clustering [12]


Outline

- Introduction
- Motivation
- Architectures for HWNs
- **Applications and Deployments of HWNs**
- Classification of Solutions
- Limitations, Open Research Problems
- Conclusions & Future Work

Applications


- Improved network access and capacity [1,2,9]
- Rural and Broadband access, Community Access Networks, Pervasive Network Coverage [5,6]
- Increased choices for consumers
 - (ability to pay more for increased service using multiple RATs)
- Multimedia Applications [4,7,8]
 - Unique challenge – high QoS requirement
- Health care, Military, Emergency Response
 - Unique challenge – high QoS and security requirement
- Interplanetary Networks [17]
 - Unique challenges – delay tolerance

Applications

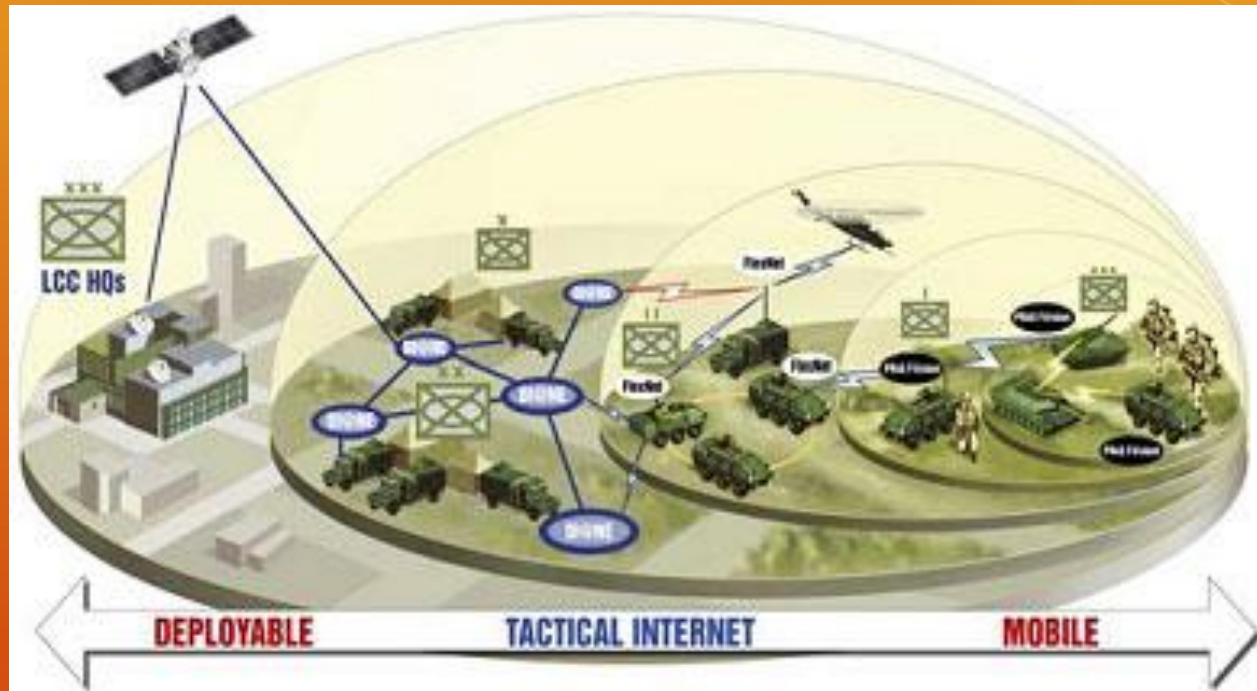

Source: Rolta & Thales (rolta.com accessed August 2010)

Applications

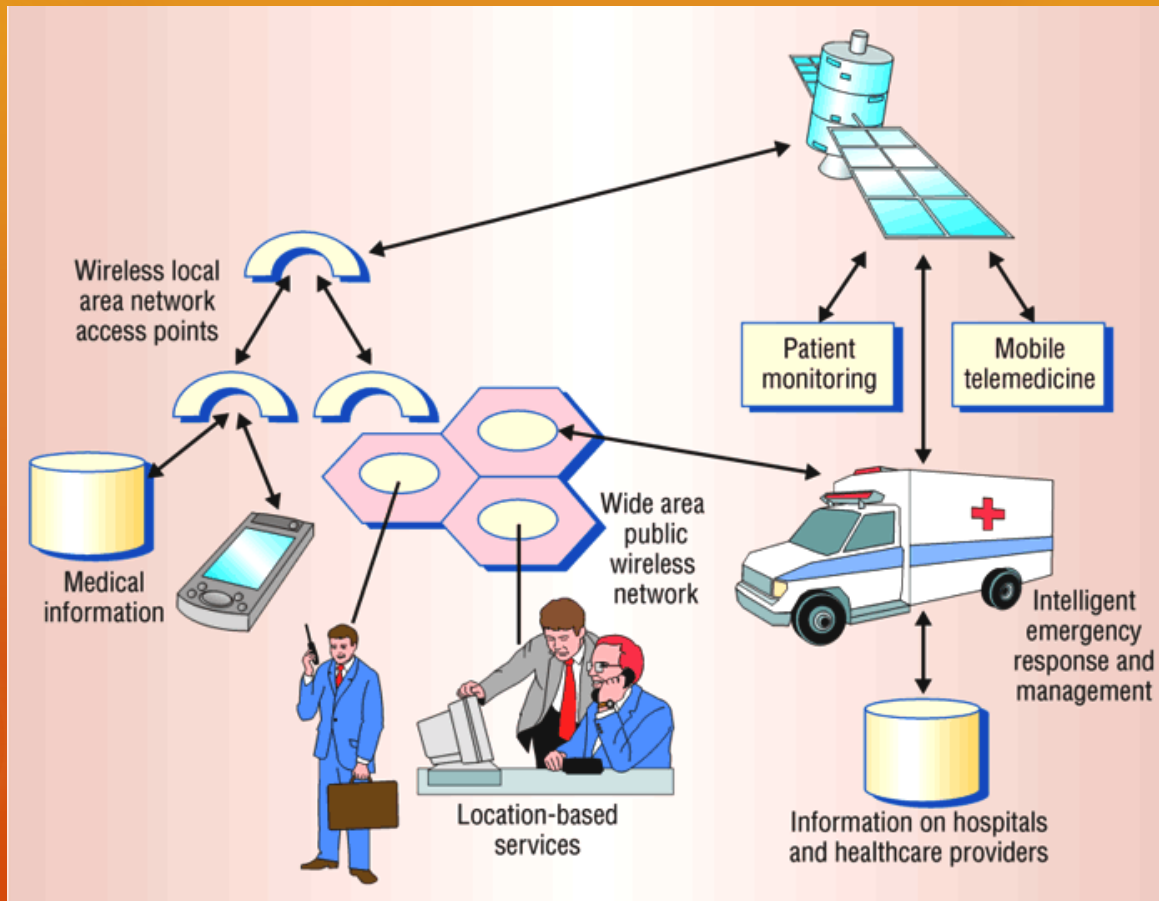

Deployments

- Testbeds:
 - HAWK – Heterogeneous Advanced Wireless network (Hong Kong Polytechnic University) (2009) [5]
 - SCORPION – Santa Cruz mObile Radio Platform for Indoor and Outdoor Networks (University of California at Santa Cruz) (2009) [6]
- Some LTE or 4g mobile networks
 - Smooth handover / handoff between heterogeneous networks is a requirement of these networks
 - Many LTE and 4g Networks are still in early stages of deployment
 - “Heterogeneous” usually does not include technology such as wifi (only other existing mobile technologies)

Outline

- Introduction
- Motivation
- Architectures for HWNs
- Applications and Deployments of HWNs
- **Classification of Solutions**
- Limitations, Open Research Problems
- Conclusions & Future Work

Classifications by Research Area

- Radio Resource Management
 - Resource Scheduling [16]
 - Power Control, Rate Control, Access Control [7,8,9]
 - Prefetching, Caching [13,14]
 - Cognitive / Software Defined Radio
- Quality of Service (QoS)
 - Service classes, Access Control / Access Selection [8,9]
 - Topology Control, Routing, Relay Placement [11,12,13]
 - Delay Tolerance [17]
- Handover / Handoff
 - Optimal Network Selection [4]
 - Mobility Management [1,2]
- Other popular research areas that will not be covered in this talk
 - Security, Multichannel / Multi radio, non-QoS routing ...

Outline

- Introduction
- Motivation
- Architectures for HWNs
- Applications and Deployments of HWNs
- Classification of Solutions
- **Limitations, Open Research Problems**
- Conclusions & Future Work


Open Research Problem: Radio Resource Management

- Limited bandwidth in wireless networks
- Broadcast medium creates problems such as hidden and exposed terminal
 - Contribute to poor multi-hop wireless performance
- Mobile devices extremely limited in resources (power, cpu, memory)
- Manage the Resources in the network while keeping in mind QoS
 - In HWN, the major unique problem is vertical handover
 - In other networks, Resource Management & QoS studied extensively (WLAN, WMN, adhoc etc)

Open Research Problems: Radio Resource Management

- Resource Scheduling [16]
 - Managing Time, Space in Queues, Frequency etc.
- Power Control, Rate Control [7], Access Control [8,9]
 - Avoid interference, minimize power consumption
 - Prevent buffer overflows, avoid bottlenecks
 - Avoid admitting more users than can be supported
- Prefetching, Caching [13,14]
 - Avoid requests from the original source on the Internet by temporarily storing at some level in the hetero network
- Cognitive / Software Defined Radio

Open Research Problems: Radio Resource Management

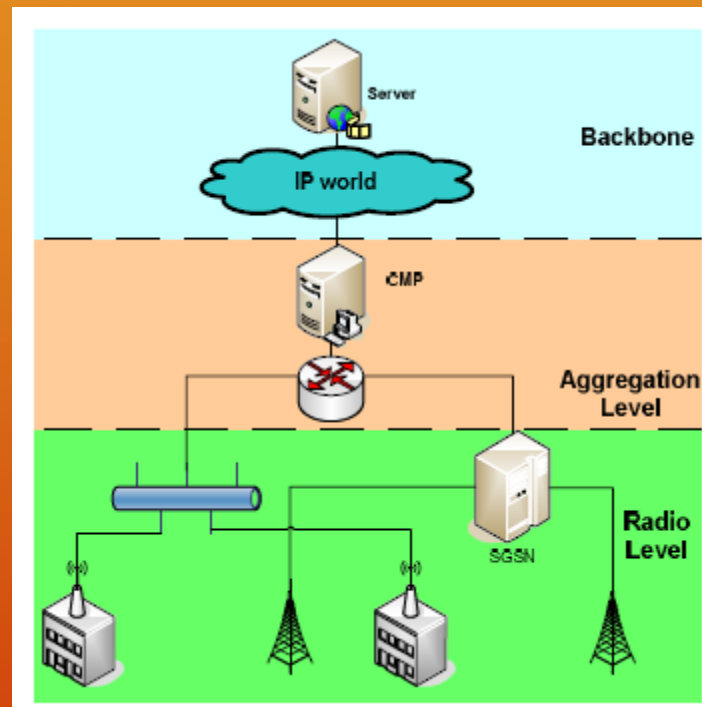

Source: Goebbels [14], ex) of caching architecture

Open Research Problems: Quality of Service (QoS)

- Provide some guarantee of service level, support for particular applications (multimedia, voice, web, email etc)
- Service classes, Access Control / Access Selection [8,9]
 - Each service class has different priority
 - Access is controlled by whether there is capacity to admit based on priority classes
- Topology Control [11,12], Routing, Relay Placement [13]
 - QoS aware routing
 - Some research suggests relays increase capacity, thus increase QoS by adding more relays in strategic points
 - GW placement for optimal QoS
- Delay Tolerance [17]
 - Some applications have delay tolerance (email, download etc)
 - Some network types this becomes more important (long distance, or opportunistic networking)


Open Research Problems: Handover

- Decide when to switch between technologies or between stations
- Optimal Network Selection [4]
 - Decide when to change networks while stationary (because of changing conditions)
 - Dense HWN, select the best network based on some criteria, ex):
 - Cost, Capacity, "user fairness", ...
 - Sparse HWN, which network to forward through
- Mobility Management [1,2]
 - Deciding when to change networks while moving
 - Vertical Handover (between technologies or component networks) [9,1,2]
 - Horizontal Handover (within a technology or component network) (many existing works in cellular/mobile ,WMN etc

Handover


Optimal Network Selection

Congestion

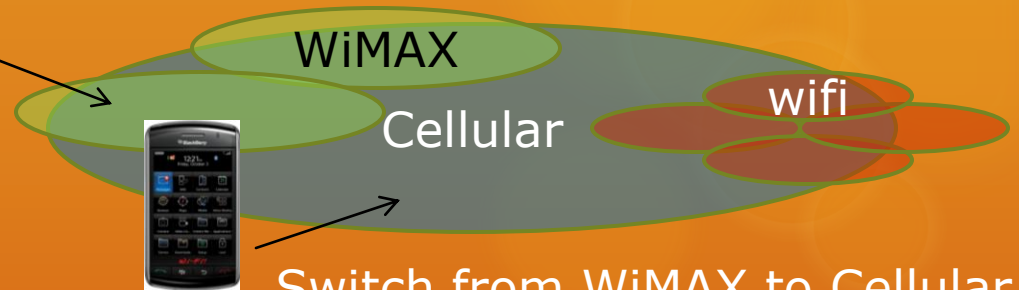


Switch from WiMAX to Cellular

Mobility Management

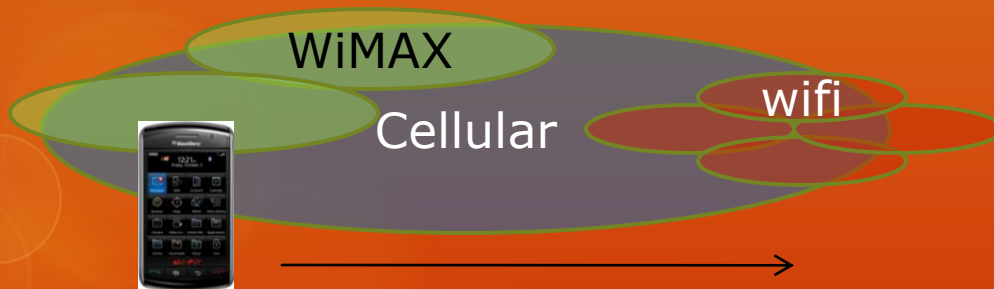

Switch as device moves out of range

Handover Types

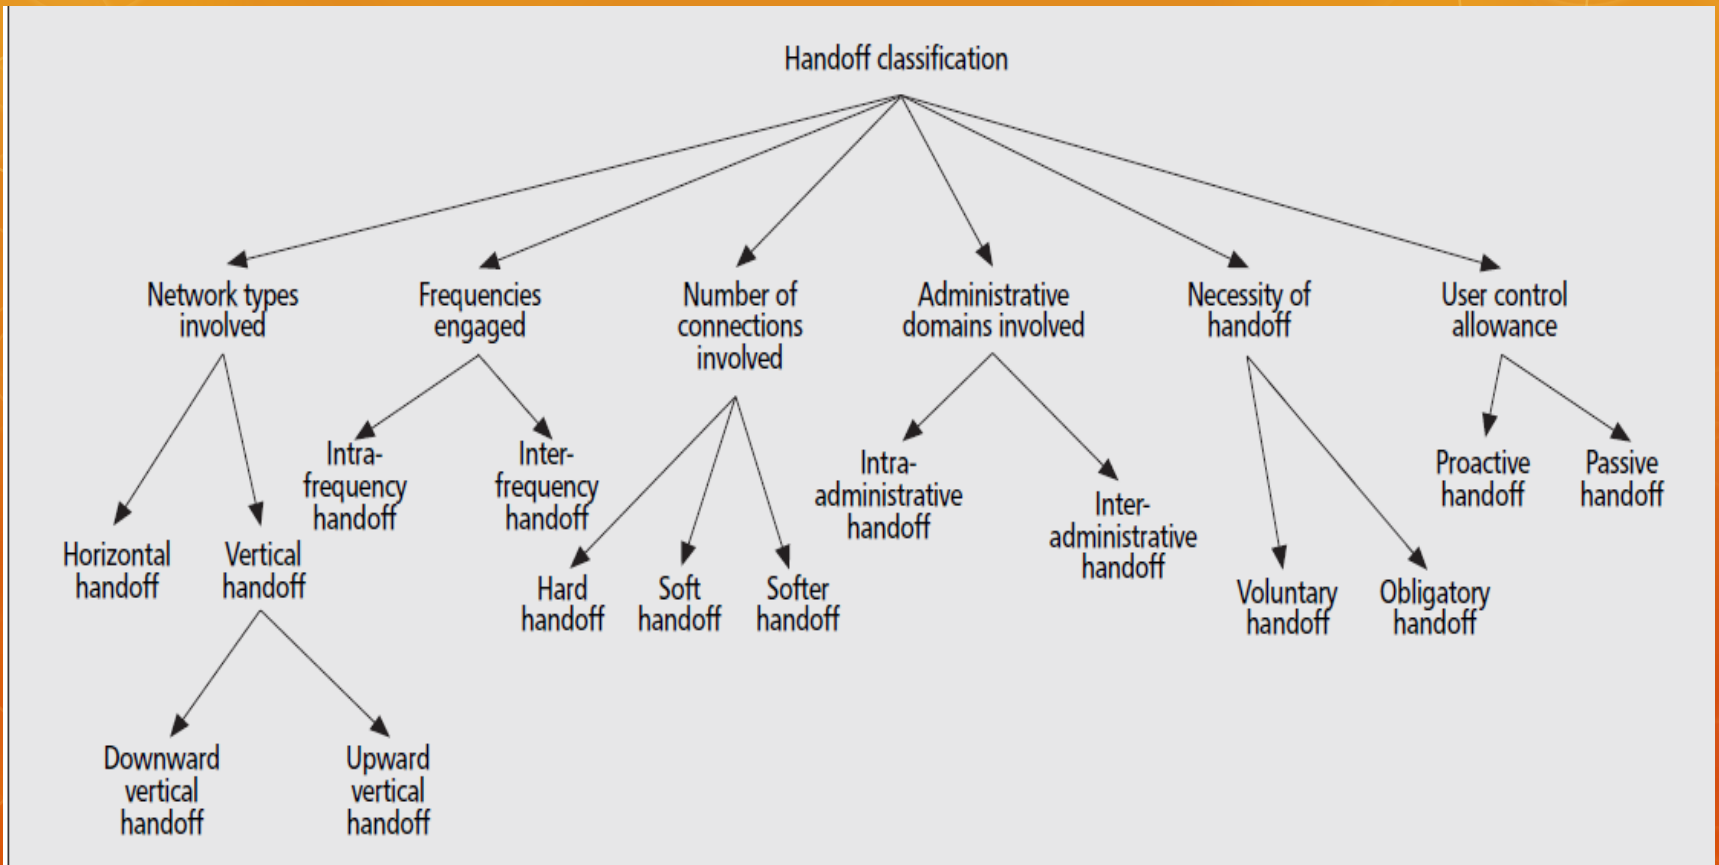


Handover

- Often formulated as an optimization problem
 - Cost / Reward function which determines whether a handoff should occur [3,4]
- Many solutions are adaptive and make use of “cognitive/software radio” techniques
 - (applying AI, certain types of optimization)
 - Traditionally used to determine if radios can venture into licensed bands when not in use

Limitations & Assumptions

- Some experiments make use of small networks, more research required to ensure the networks are scalable
 - [8] uses only three WLANs and two 3g networks
- Some proposals do not account for future technology, designed specifically to a set of existing technology
 - Not “future-proof”
 - Ex) assumption of ipv4
 - Ex) assume only 2 or 3 network types: 802.11, 802.16 etc.
 - [9] Assumes only 802.11 + 3G
- Many proposals for interoperability, little work in standardization [9]
- Existing work uses mostly simulation, it is recognized that experiments must be evaluated in test-beds and on real equipment when possible

Limitations & Assumptions

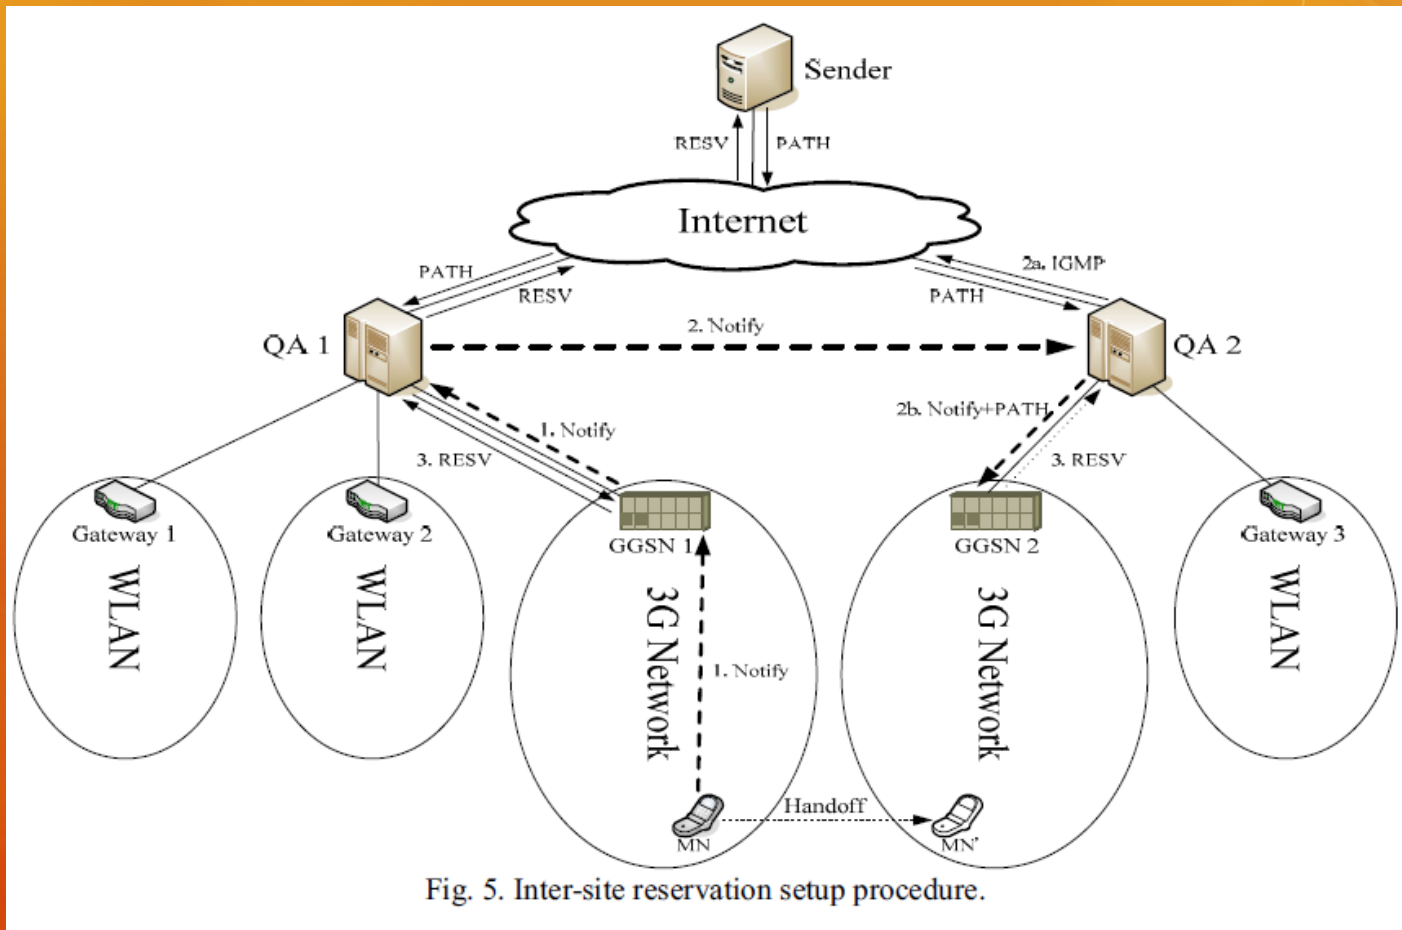

Future Work

- Investigate cross-layering [10] to help solve wireless problems since OSI model is not suited to wireless
 - ex) TRAMCAR cross layer architecture for HWN[1]
- Ensure any framework which is designed or used will be scalable, extensible and flexible to support future technologies
- Develop a business model or incentive program which motivates service providers to swap traffic in a manner similar to the Internet
- Many existing experimental work performed in simulation
 - extend to test-bed with equipment in PERWIN lab

Conclusions

- Broad overview of state of research in HWNs
 - Emphasis on Resource Management, QoS and Handover
- Two architectures discussed
- Existing approaches classified according to solution type
- Open Research Problems, Limitations

- Exciting active field with many applications

- Much to be done to fully realize potential of the technology

References

1. A. Hasswa, N. Nasser, H. Hassanein, "A seamless context-aware architecture for fourth generation wireless networks," in *Wireless Personal Communications*, vol. 43(1), pp. 1035-1049, 2007.
2. N. Nasser, A. Hasswa, H. Hassanein, "Handoffs in Fourth Generation Hetrogeneous Networks,"
3. Y. Zhang, M. Fujise, *Resource, Mobility, and Security Management in Wireless Networks and Mobile Communications*, October 25, 2006, *Heterogeneous Wireless Networks: Optimal Resource Management and QoS Provisioning*.
4. P. Si, F.R. Yu, H. Ji, V.C.M. Leung, "Optimal Network Selection in Heterogeneous Wireless Multimedia Networks," in *Wireless Networks*, vol. 16(5), pp. 1277-1288, July 2010.
5. J. Cao, K. Xie, W. Wu, C. Liu, G. Yao, W. Feng, Y. Zou, J. Wen, C. Zhang, X. Xiao, X. Liu, Y. Yan, "HAWK: Real-World Implementation of High-Performance Heterogeneous Wireless Network for Internet Access," in *29th IEEE Int. Conf. on Distributed Computing Systems Workshops*, pp 214-220, 2009.
6. S. Brommage, C. Engstrom, M. Bromage, S. Dabideen, M. Hu, R. Menchaca-Mendez, D. Nyugen, B. Nunes, V. Petkov, D. Sampath, H. Taylor, M. Veyseh, J.J. Garcia-Luna-Aceves, K. Obraczka, H. Sadjadpour, B. Smith, "Poster Abstract: SCORPION: A Heterogeneous Wireless Networking Testbed," in *Mobile and Communications Review*, vol 13 (1), pp. 65-68, January 2009.
7. A. Boukerche, F. Kazem, "An Adaptive Rate Control Algorithm for Real-time Streaming of 3d Image-based Rendering over Heterogeneous Wireless Networks," in *Proc. of Int. Symposium on World of Wireless, Mobile and Multimedia Networks*, pp. 462-468, 2006.
8. N-C. Wang, J-W. Jiang, "Extending RSVP For QOS Support in Heterogeneous Wireless Networks," in *Int. Conf. on Communications Systems (ICCS 2006)*, pp. 1-5, October 2006.

References

9. M. Kim, S-Y. Kim, S-J. Cho, "A Study of Seamless Handover Service and QoS in Heterogeneous Wireless Networks," in the 9th Int. Conf. on Advanced Communication Technology, pp. 1922-1925, February 2007.
10. Z. Chen, "A Customizable QoS Strategy For Convergent Heterogeneous Wireless Communications," in IEEE Wireless Communications, pp.1536 – 1284, April 2007.
11. N. Li, J.C. Hou, "Topology Control in Heterogeneous Wireless Networks: Problems and Solutions," in 23rd IEEE Computer and Communications Societies INFOCOM, pp. 232-243, 2004.
12. Y. Zhu, H. Xu, J. Xiao, "A Clustering Topology Control Algorithm for Heterogeneous Wireless Networks," in Int. Conf. on Communications, Circuits and Systems, pp. 392-396, May 2005.
13. S. Drew, B. Liang, "Mobility-Aware Web Prefetching Over Heterogeneous Wireless Networks," in 15th IEEE Conf. On Personal, Indoor and Mobile Communications (PIMRC 2004), pp. 687 – 691, 2004
14. S. Goebbels, "Smart Caching Joins Hierarchical Mobile IP," in Vehicular Technology Conference (VTC 2007) pp. 2625 – 2630, 2007.
15. C. Shen, "A Heuristic Relay Positioning Algorithm for Heterogeneous Wireless Networks," in Vehicular Technology Conference (VTC 2009), pp. 1-5, April 2009.
16. S.Z. Ahmad, M.A. Qadir, M.S. Akbar, "A distributed resource management scheme for load-balanced QoS Provisioning in Heterogeneous Mobile Wireless Networks," in Int. Workshop on Modelling, Analysis and Simulation of Wireless and Mobile Systems, pp. 63-70, 2008.
17. H. Samuel, W. Zhang, B. Preiss, "Routing over Interconnected Heterogeneous Wireless Networks with Intermittent Connections," in International Conference on Communications (ICC 2008), pp 2282 – 2286, May 2008.

Questions?


Thanks for listening

Jason Ernst, University of Guelph

Email: jernst@uoguelph.ca


Website: <http://www.uoguelph.ca/~jernst>

Hidden Terminal Problem

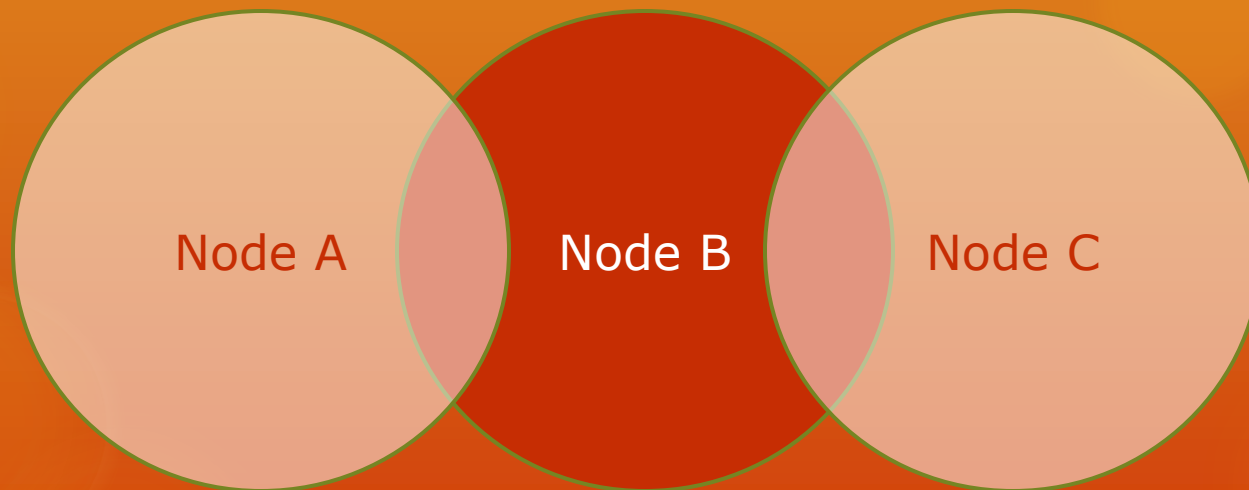

39 Both A and C can communicate with B but cannot detect each other leading to collisions at B, solved with RTS/CTS but introduces ET problem

Exposed Terminal Problem

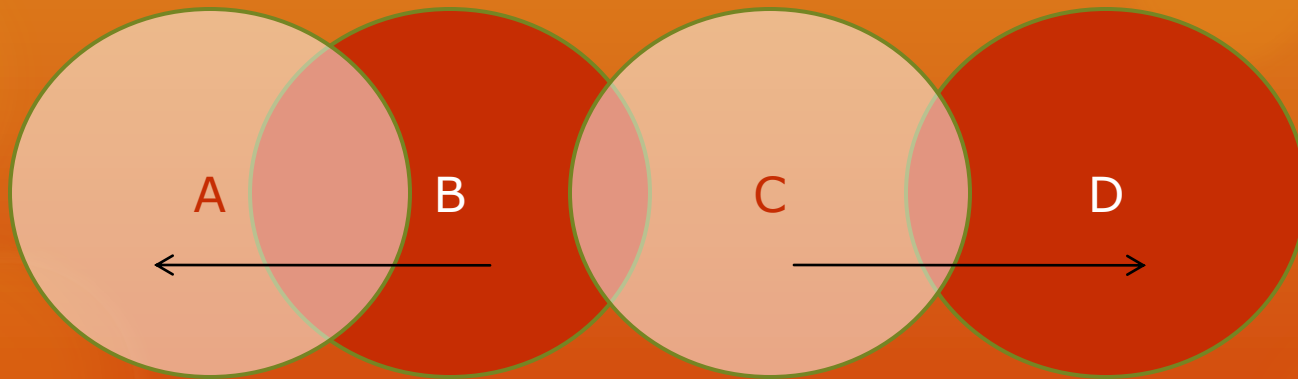

B and C detect each other and fail to transmit even though A is out of range of C and D is out of range of A

Classification by Network Type

- Number and type of technologies involved
 - Ex) 802.11, 3g [9]
- Number of layers / tiers involved (the highest number of overlapping coverage technologies)
 - 2 Layer [9]
 - 3 Layer
 - 4 Layer ...
- Sparse or dense (whether overlap is supported or not)
 - Majority of current work is in dense HWN

Classification by Objective

- Increasing performance (packet delivery ratio, throughput, delay etc.)
- Increasing profit, or conversely decreasing cost (take into consideration cost of using particular networks within the hetero network)
- Increasing coverage or capacity (solutions which use multiple access technologies to increase service)